

The Shortening Shuttle®

Economy Series

Model #SS-611-T



Capacity: 80 Lbs / 10.5 Gal.

Min. Fryer Drain Height: 11.5 in.

Max. Dumpster Height: 49.5 in.

Overall Shipping Dims: 12 x 13 x 58 in. 27 Lbs

STANDARD FEATURES:

Construction:

- ◆ Heavy duty construction, 0.10 thick aluminum body.
- ◆ Double walled seams and deep weld penetration.
- ◆ Perforated Baffle Screen to prevent splashing and to catch large debris.
- ◆ Sealed hardwood handle at both ends to help lessen heat transfer.

Works with:

- ◆ Fryers w/front, side or bottom drains.
- ◆ Fryers w/Automatic filtering systems.
- ◆ Broaster® Equipment & Pasta Cookers.
- ◆ Dumpsters up to 49.5 in. tall.
- ◆ Dumpster opening: min. of 8¼ in. x 7¾ in.
- ◆ Dumpster opening setback from front edge of dumpster: max. 3½ in.*

Cautions:

- Allow shortening to cool to 120° F or less to reduce the likelihood of burns.
- Never use any of our *Shortening Shuttle*®s without the baffle screen in place.
- Never pour caustic cleaning products inside or on the outside of the *Shortening Shuttle*®.
- Always use safety gloves when using any of our *Shortening Shuttle*®s .

Fill

Walk



Push




Hook



Squat



Empty

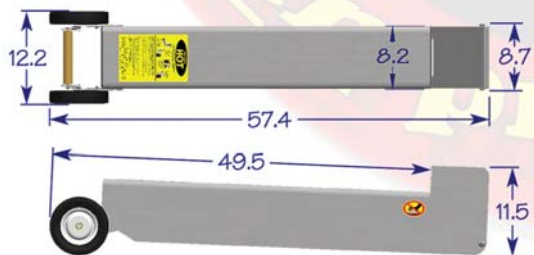

OPTIONS:

- | | |
|---------------------|--------------------------------|
| Stair Plate | must be ordered with a Shuttle |
| Wall Hook | SS-WHOOK |
| *Dumpster Extension | SS-611-DX |
| Shuttle Filter | SS-SF-100 |
| Shuttle Cover | SS611COV |
| Fryer Drain Hose | FDH-??NPT |
| Safety Glove | Heat Resistant 914-207 |

Specifications subject to change without notice.

Worcester Industrial Products Corp

7 Brookfield street Worcester, MA 01605

800-533-5711 508-757-5161 FAX 508-831-9990

sales@Shortening-Shuttle.com

www.Shortening-Shuttle.com